

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 July 2001 (26.07.2001)

PCT

(10) International Publication Number
WO 01/54100 A1

(51) International Patent Classification⁷: G09F 3/03

(DK). REMARK, Preben, Michael [DK/DK]; Oneseal A/S, Vibe Allé 2, DK-2980 Kokkedal (DK).

(21) International Application Number: PCT/DK01/00026

(22) International Filing Date: 15 January 2001 (15.01.2001)

(74) Agent: HOFMAN-BANG A/S; Hans Bckkevolds Allé 7, DK-2900 Hellerup (DK).

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 2000 00081 19 January 2000 (19.01.2000) DK

(71) Applicant (for all designated States except US): ONE-SEAL A/S [DK/DK]; Vibe Allé 2, DK-2980 Kokkedal (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): VELSCHOU, Jens [DK/DK]; Oneseal A/S, Vibe Allé 2, DK-2980 Kokkedal

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: A SEAL

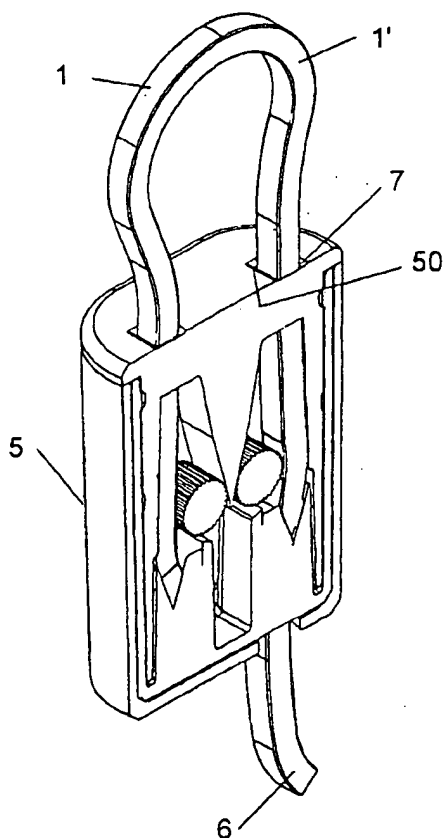

(57) Abstract: The invention relates to a lock comprising a housing (5) and a strap (1) that has a first end (2) and a second end (6), said housing (5) comprising: means (4) for securing the first end (2) of the strap (1); an interior cavity (40); a first (7) and a second (8) opening that give access from the exterior to said cavity (40), and allow advancement through the housing (5) of the second end (6) of the strap (1); a first interior, longitudinally extending wall (9) and a second opposed, interior, longitudinally extending wall (10), said walls extending between said first and second openings; a locking device (14) arranged within the cavity (40) between the first (9) and the second (10) walls and that defines a nipping area (45) for securing the second end (6) of the strap (1); and support areas (50) for the strap (1) whereby turning of the strap (1) about its longitudinal axis is prevented. The invention is characterised in that the strap (1) is a string of a plastics material (110) having a polygonal cross section; and that the locking device (14) has a surface that is toothed and/or rough.

WO 01/54100 A1



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

A SEAL.

The present invention relates to a lock as described in the preamble to claim 1 and comprising a housing and a
5 pull absorbing strap.

US patent disclosure No 4,074,916, incorporated herein by reference, teaches such lock wherein the strap is constituted by a wire or a cable. In this patent it is
10 described how safety is increased against a person being able to release the lock by pulling the wire while simultaneously the wire is turned or rotated about its longitudinal axis. In this prior art lock, the locking device for the wire is a disc that is - by means of a
15 spring fitted in the cavity between the sidewalls of the housing - pressed against the entry openings for the free end of the wire. Hereby the spring ensures that the disc will always wedge securely in order to tightly nip in the wire if it is attempted to pull out the wire through the
20 entry opening. If, conversely, the wire is pulled in the opposite direction - out through the exit opening for the wire, the spring yields and the wire is able to pass freely. When thus the one end of the wire is secured in the lock housing and the opposite end is pulled through
25 the housing, a closed wire loop is obtained that cannot be opened, but only be tightened. Locks of this type are used for a variety of sealing purposes, eg for sealing of large transport containers. Once the lock has been tightened it cannot be removed unless the wire or the
30 lock is damaged.

The US patent disclosure teaches that, in advance, the wire or the cable has been pressed flat to bring about an oval cross section. Besides the lock housing is provided

interiorly with such configuration that said turning or rotation of the wire becomes difficult, the housing along with the disc forming support areas intended to prevent such turning. Albeit the US patent disclosure does not
5 mention the wire configuration in detail, it seems, however, that it is the case of a conventional wire formed by helical winding of a number of metal wires. In order to accomplish said oval cross section, a difficult pressing operation is thus required that uses a complex
10 pressing tool.

It is the object of the present invention to provide an improved lock that is both reliable and inexpensive and that does not presuppose initial flat-pressing of a wire.
15 The lock being a disposable device sold in large numbers, even a minor reduction in the production costs is important, and thus the invention makes it possible to eliminate the need for a complex pressing tool.

20 This is obtained by a lock of the kind described above, wherein the strap is a string of a plastics material and having a polygonal cross section. Besides, particularly advantageously the locking device can have a toothed or/and rough surface. This also means that it is
25 possible, in a simple manner, to ascertain visually whether attempts have been made to break the lock, since such attempt will translate into damage to the strap surface. "Polygonal" as used herein designates both a convex and a concave polygon, while it is expected,
30 however, that a string with a convex polygonal cross section will be simpler to manufacture. The string can, in cross section, have sides of equal size and the string can, in cross section, have slightly rounded corners.

The housing and the locking device can, in a conventional manner, be configured as featured in claim 2 where the housing has an interior, sloped wall that forms a guide for the locking device that is preferably configured for
5 being able to roll along this wall.

The support areas of the housing can be formed in a variety of ways, including the way featured in claim 3, by the entry opening for the strap having a cross section
10 that is complementary with the polygonal cross section of the strap. Preferably, in the nipping area for the strap, an interior wall in the housing may be provided with a track shaped in accordance with the cross section of the strap. Advantageously it can be a ridged indentation
15 whereby a portion of the strap can be received in the guide between the wall and the locking device and secured against said turning when the strap is oriented by a nipping force oriented perpendicular to axial direction and exerted by the locking device. It will be understood
20 that in that case the support face of the locking device will constitute a part of the support areas that serve to prevent turning.

Particularly advantageously the strap can be reinforced,
25 eg with fibres that are distributed in the plastics material or by a central, longitudinally extending core of metal that can be manufactured in a conventional manner by twisting of metal wires. In that event the strap can advantageously be manufactured by extrusion.

30

The entry opening, ie the first opening of the housing, and the exit opening, ie the second opening of the housing, for the strap as featured in claim 10 having particular linear guides for the strap, it is possible to

apply to the strap, during its advancement through the cavity within the housing, to a resilient flexing, the upwardly oriented momentum of which urges the strap towards the locking device.

5

Hereby it is thus ensured that the locking device will, by any movement of the strap towards the entry opening, be firmly wedged between the strap and the sloping wall. Simultaneously it is possible to altogether omit a
10 separate resilient body, the resilient effect of a slightly flexed strap being used to ensure a nipping force between the locking device and the strap. This effect is obtained in the linear guides being, at the entry and/or exit opening (5), oriented towards one
15 surface of the locking device. Hereby it is ensured that the strap cannot pass through the cavity of the housing from the entry opening to the exit opening without having to flex. US patent No 3,770,307 teaches a corresponding solution.

20

As featured in claim 11 the locking device can conveniently be a substantially circular metal disc or roller with the rough or toothed surface along the circle periphery. Such locking device is extremely simple to
25 manufacture.

In accordance with an embodiment according to claim 12, the linear guide of the entry directs the strap towards a tangent of the locking device and the linear guide of the
30 exit directs the strap towards a chord of the locking device.

In accordance with an embodiment according to claim 13, the lock is particularly simple to manufacture.

Additionally, the lock may conveniently be configured as featured in claim 14. Hereby a high degree of symmetry is accomplished which is advantageous from a technical production point of view and, besides, it is possible for
5 the end user himself to mount the first end of the strap in the lock.

In the following, an embodiment of the lock is described in further detail with reference to the drawing, wherein
10

Figure 1 is a perspective sectional view through a lock according to the invention;

Figure 2 is a planar sectional view through a central
15 plane in the lock shown in Figure 1;

Figure 3 is a sectional view through the lock along the line B-B in Figure 2; and

20 Figures 4a-4 show enlarged sections of Figure 3.

The lock according to the invention comprises a housing 5 and a flexible strap 1. The strap 1 has, as shown (Figure 2), a first end 2 intended for being conveyed through an
25 entry opening 3 in the housing 5 and for being secured to the housing 5 before the lock is taken into use. In the embodiment shown the securing of the end 2 is accomplished by means of a movable locking device 14', but other means of securing are possible. Thus the first
30 end 2 of the strap 1 can be cast or nipped firmly within the housing 5.

In accordance with the invention shown the strap 1 is a flexible string manufactured from a plastics material,

and the strap 1 has - in this example - a square cross section with lateral portions 1'. The strap 1 has a tensile strength that is, during manufacture, adjusted in accordance with the intended use of the lock. The tensile strength can optionally be increased by reinforcing the string, but it is within the scope of the invention to use a string that is made exclusively of plastics.

The opposite end 6 of the strap is conveyed through or around the body (not shown) that is to be secured and through the housing 5 via an entry opening 7 and an exit opening 8. The openings 3, 7 and 8 give, as will appear, access to an interior cavity 40 within the housing 5.

In the cavity 40 there are, between the openings 7 and 8, arranged two walls 9 and 10, of which the wall 9 extends substantially along the longitudinal axis of the housing and in direct extension of the opening 7. The sidewall 10 has a sloping course whereby the distance between the two walls is reduced in a direction towards the opening 7. A disc or roller shaped lock device 14 is situated within the housing 5 between the sidewall 10 and the strap 1, and when it is attempted to pull the strap 1 out through the entry opening 7, the lock device 14 will roll along the wall 10 and wedge firmly between the wall 10 and the strap whereby the further movement of the strap 1 in that direction is prevented.

Both openings 7 and 8 have linear guides for the strap 1, such that the orientation of the strap 1 into the housing is controlled. The linear guide at the opening 7 leads the strap in the longitudinal direction of the housing 5 and along the wall 9, and the linear guide at the opening 8 conveys the strap in the longitudinal direction of the

housing, but is slightly offset relative to the entry 7. Thereby the strap is conveyed towards a chord of the locking device 14. In order to pass from the entry opening 7 to the exit opening 8 and around the locking device 14, the strap will have to flex. Such flexing will occur as a consequence of the strap be being resilient. It is noted that this effect can be achieved both by use of the strap of plastics material in accordance with the invention and by use of a wire that is not coated by a plastics jacket.

As mentioned, the locking device 14 is a round disc or roller that has, along its periphery, a toothing or is rough. The resilient abutment of the strap 1 on the periphery of the disc or roller and the rough surface will cause the roller or disc to roll upwards on the face 10, if attempts are made to pull the strap out through the entry opening 7, whereby the strap is wedged firmly against the face 9 due to the sloped course of the face 10. Thereby it is ensured that once it has been conveyed out through the opening 8, the strap cannot be withdrawn. A corresponding mechanism is used to withhold the first end 2 of the strap within the housing. Only in that case there is no exit, but - conversely - a blind hole 18 down into which the strap is conveyed. The linear guides, the sidewalls 9' and 10' at the entry 3, and the locking device 14' are configured in the same manner as was the case with the through-going opening.

In the embodiment shown the housing 5 comprises a jacket 11 and an insert 12. The insert 12 matches into the jacket 11 and is secured therein by a snap locking connection 13. Conveniently the jacket is made of plastics and the insert of metal or plastics that can

optionally be reinforced, but other material combinations are possible. The locking devices 14 and 14' are preferably made of metal. As will appear from the figure, the walls 9 and 10 and the entries 3 and 7 are configured with associated guides for the insert 12, and the jacket forms the exit 8 and the blind hole 18 with associated guides.

Figure 1 shows a part of the housing 5 at the opening 7. It will appear that in this area the opening 7 is configured with a cross section that is complementary to the cross sectional shape of the strap 1, ie in the case shown preferably with a square cross section and a clearance width that corresponds approximately to the dimensions of the strap 1, whereby turning of the strap 1 about its longitudinal axis outside the housing will not give rise to a corresponding turning of that part of the strap 1 that is situated within the housing 5. The sides 7 of the openings thus form a support area 50 for the strap in this region.

Now Figure 2 shows how the housing 5 can comprise further support areas 50 intended for preventing a rotation of that part of the strap 1 that is situated within the housing 5. More specifically, these support areas are located at the nipping area 45 for the strap 1, ie in the area where the strap 1 can be firmly nipped between the locking device 14 and the wall 9. The support area 50 is in this case defined by the surface of the locking device 14 and by the surface of the wall 9. Figures 4a-e show enlarged sections of Figure 3 that show a cross section between the housing 5 at the nipping area 45. Figures 4a-e show alternative cross sectional shapes for the strap 1, and it will appear that the strap 1 is configured with

a polygonal cross section with preferably three, four, five or six sides. As will appear the strap 1 is configured as a string of a plastics material 110 that is, in the embodiment shown, reinforced with a number of
5 longitudinally extending, twisted metal wires 100.

It will appear from Figures 4a-d that the wall 9 can be provided with a track 47 that is dimensioned to be able to receive a portion of the cross section of the strap 1.
10 Preferably the opening 7 is configured such that the strap 1 is automatically aligned to a correct position in order to be receivable in the track 47. Preferably the track 47 has, as will appear, side edges that meet in angles corresponding to the polygonal cross section of
15 the strap 1. However, the track 47 is not an absolute necessity, since the wall 9 may very well be planar as shown in Figure 4e. However, it is of importance that the wall 9 and the locking device 14 are configured and adjusted in accordance with the cross sectional shape of
20 the strap 1 so as to establish support areas 50 that prevent the strap 1 from turning.

C l a i m s

1. A lock comprising a housing (5) and a strap (1) that
has a first end (2) and a second end (6), said housing
5 (5) comprising:

means for securing the first end (2) of the strap (1);

an interior cavity (40);

10

a first (7) and a second (8) opening that give access
from the exterior to said cavity (40), and that allows
advancement through the housing (5) of the second end (6)
of the strap (1);

15

a first interior, longitudinally extending wall (9) and a
second opposed, interior, longitudinally extending wall
(10), said walls extending between said first and second
openings;

20

a locking device (14) arranged within the cavity (40)
between the first (9) and the second (10) walls and that
defines a nipping area (45) for securing the second end
(6) of the strap (1); and

25

support areas (50) for the strap (1) whereby rotation of
the strap (1) about its longitudinal axis is prevented,

characterised in

30

that the strap (1) is a string of a plastics material
(110) having a polygonal cross section; and

that the locking device (14) has a surface that is toothed and/or rough.

2. A lock according to the preceding claim, **characterised**
5 in that that locking device (14) is configured for being movable in a direction towards the first opening (7); and that the second wall (10) has a sloped course relative to the first wall (9) whereby the distance between the first (9) and the second (10) walls is reduced in a direction
10 towards said first opening (7) thereby defining the nipping area (45) between the first wall (9) and the locking device (14).

3. A lock according to any one of the preceding claims,
15 **characterised** in that the first opening (7) has a cross section that is complementary with the polygonal cross section of the strap (1) for forming said support areas (50) for preventing axial rotation of the strap (1).

20 4. A lock according to the preceding claim, **characterised** in that the first wall (10) is, at least at the nipping area (45), provided with a track (47) that extends along the strap (1) with support areas (50) for the strap (1) in order to combine with the locking device (14) to
25 secure the strap (1) against said axial turning.

5. A lock according to the preceding claim, **characterised** in that the track (47) has sidewalls (50) configured for being able to abut on lateral
30 portions (1') of the strap (1).

6. A lock according to any one of the preceding claims, **characaterised** in that the string of plastics material (110) is reinforced.

7. A lock according to the preceding claim,
characterised in that the reinforcement of the
plastics material (110) is constituted by a wire
5 (100) formed by twisted metal wires.

8. A lock according to claim 6, **characterised in**
that the reinforcement of the plastics material
(110) is constituted by fibres distributed in the
10 plastics material (110).

9. A lock according to any one of the preceding
claims, **characterised in** that the strap (1) is
manufactured by extrusion.

15
10. A lock according to any one of the preceding
claims, **characterised in** that the first (7) and the
second (8) openings have linear guides for the strap
(1), the linear guide of the second opening (8)
20 being oriented towards a surface of the locking
device (14) whereby the band (1) will, by the
advancement through the cavity (40), be exposed to a
resilient flexing, the upwardly oriented momentum of
which pressing the strap (1) towards the locking
25 device (14).

11. A lock according to claim 10, **characterised in**
that the locking device (14) is a substantially
circular metal disc or roller with the rough or
30 toothed surface arranged along the circle periphery.

12. A lock according to claim 11, **characterised in**
that the linear guide of the first opening (7)
directs the strap along a tangent of the metal disc

or roller (14); and the linear guide of the second opening (8) directs the strap towards a chord of the metal disc or roller (14).

5 13. A lock according to any one of claims 10-12, **characterised in** that the housing (5) comprises a jacket (11) with the second opening (8) and its associated linear guide, and an insert (12) configured for being sealingly displaceable into the
10 jacket (11) and secured therein with a snap-connection (13), said insert (12) inwardly defining the first (9) and the second (10) walls, wherein the insert (12) is - in the end portion that faces away from the jacket (11) - provided with the first
15 opening (7) with its linear guide.

14. A lock according to any one of the preceding claims, **characterised in**

20 that the housing (5) comprises a third opening (3) that gives access to said cavity (40) and allows introduction into the housing (5) of the first end (2) of the strap (1);

25 that the cavity (40) comprises a third longitudinally extending wall (9') and an opposed fourth, longitudinally extending wall (10'), said walls extending from said third opening (3), wherein the fourth wall (10') has a sloping course relative
30 to the third wall (9') whereby the distance between the third (9') and the fourth (10') walls is reduced in a direction towards said third opening (3); and

that the means for securing the first end (2) of the strap (1) are in the form of a movable locking device (14') arranged in the cavity (40) between the third (9') and the fourth (10') sidewalls in order
5 to combine with the third wall (9') to define a nipping area for securing the first (2) end of the band (1).

1/2

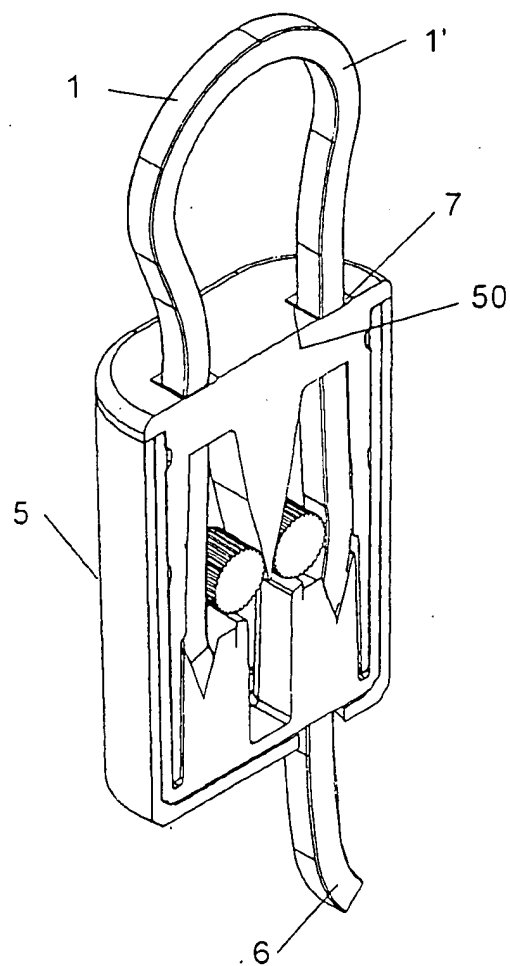


Fig. 1

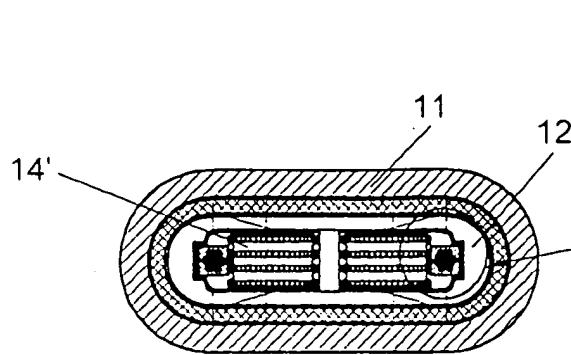


Fig. 3

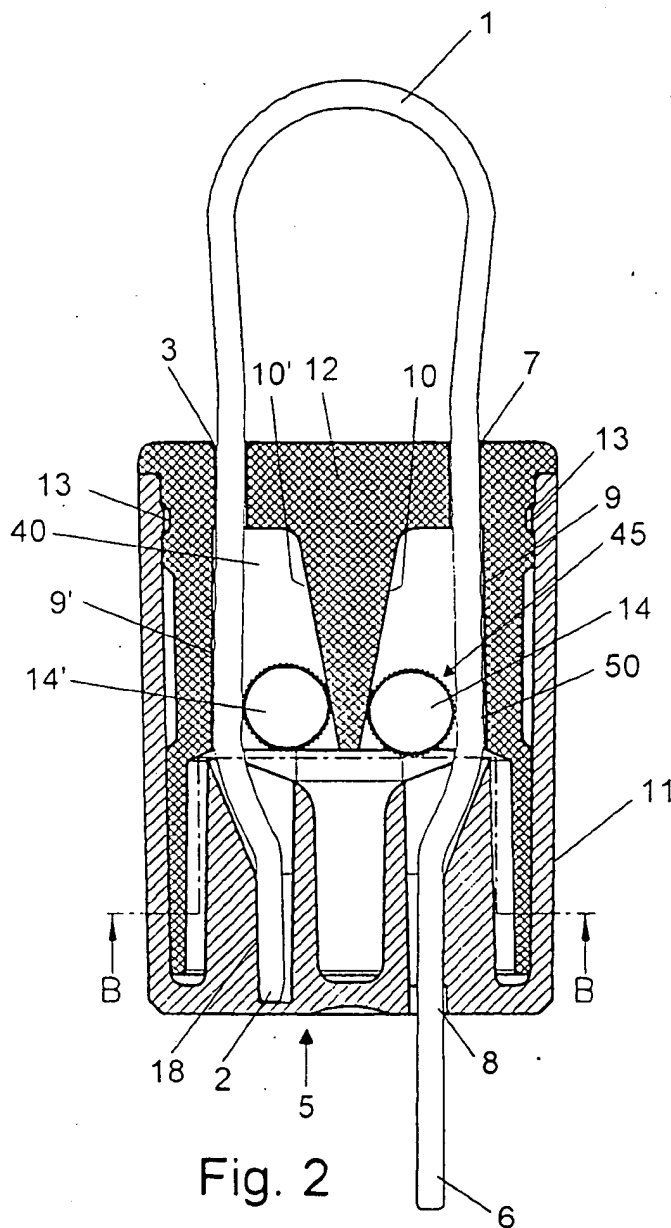


Fig. 2

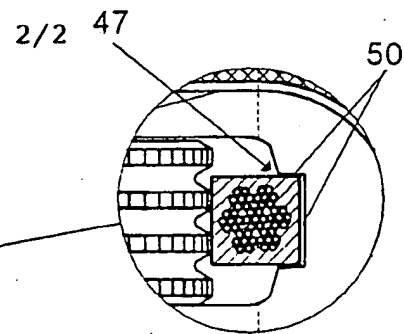


Fig. 4a

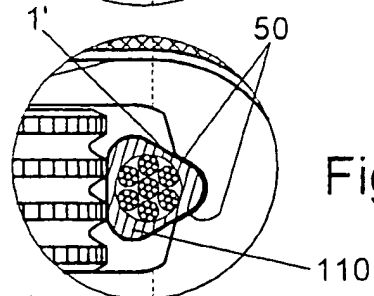


Fig. 4b

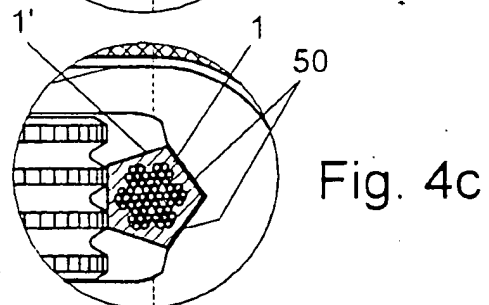


Fig. 4c

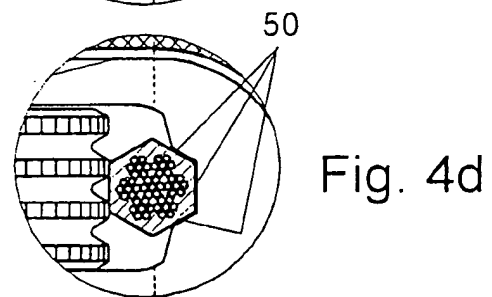


Fig. 4d

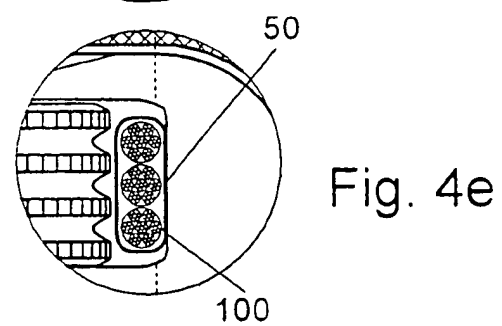


Fig. 4e

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 01/00026

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G09F 3/03

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G09F, F16G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5123686 A (J.H.C. WENK), 23 June 1992 (23.06.92)	1-5
Y	--	6-14
X	US 4688302 A (J.E. CAENEY ET AL), 25 August 1987 (25.08.87)	1-5
Y	--	6-14
Y	US 3770307 A (J.J. VAN GOMPEL), 6 November 1973 (06.11.73)	10-14
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 April 2001

Date of mailing of the international search report

12-04-2001

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Christer Wendenius / MRo

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 01/00026

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5647620 A (R. KUENZEL), 15 July 1997 (15.07.97) --	13
Y	US 5127687 A (R. GUILER), 7 July 1992 (07.07.92) --	13
Y	US 4681355 A (T. BRAMMALL ET AL), 21 July 1987 (21.07.87) --	14
Y	FR 2742908 A1 (FORS FRANCE SA SOCIETE ANONYME), 27 June 1997 (27.06.97) --	6-9
Y	US 4130686 A (M. TAKAHASHI ET AL), 19 December 1978 (19.12.78) --	6-9
A	EP 0774598 A1 (BRAMMALL, INC.), 21 May 1997 (21.05.97) --	
A	US 4640538 A (T.N. BRAMMALL), 3 February 1987 (03.02.87) --	
A	EP 0540475 A2 (E.J. BROOKS COMPANY), 5 May 1993 (05.05.93) --	
A	US 3045303 A (W. WADE), 24 July 1962 (24.07.62) --	
A	US 4074916 A (R. SCHINDLER), 21 February 1978 (21.02.78) --	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 01/00026

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5253003 A (J.A. BYSTRY), 4 October 1994 (04.10.94) --	
A	US 5765885 A (NETTO), 16 June 1998 (16.06.98) --	
A	US 5337459 A (D.L. HOGAN), 16 August 1994 (16.08.94) -- -----	

INTERNATIONAL SEARCH REPORT
Information on patent family members

25/02/01

International application No.

PCT/DK 01/00026

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5123686	A	23/06/92	CA	2078314 A,C	31/03/93
				MX	9205618 A	01/05/93
US	4688302	A	25/08/87	BE	738777 A	12/03/70
				CA	963636 A	04/03/75
				CA	993632 A	27/07/76
				CH	529460 A	15/10/72
				CH	548126 A	11/04/74
				CH	549890 A	31/05/74
				DE	1944511 A,B	19/11/70
				DE	1966107 A,B	08/07/71
				DE	1966108 A,B	08/07/71
				DE	1966109 A,B	29/07/71
				DK	126072 B	04/06/73
				FI	52415 B,C	02/05/77
				FR	2038292 A	08/01/71
				GB	1287587 A	31/08/72
				GB	1287588 A	31/08/72
				GB	1287589 A	31/08/72
				NL	6913529 A	09/10/70
US	4681355	A	21/07/87	NO	126285 B	15/01/73
				SE	364605 B	25/02/74
				SE	373005 B,C	20/01/75
US	3770307	A	06/11/73	NONE		
US	5647620	A	15/07/97	NONE		
US	5127687	A	07/07/92	NONE		
US	4681355	A	21/07/87	NONE		
FR	2742908	A1	27/06/97	NONE		
US	4130686	A	19/12/78	AU	507013 B	31/01/80
				AU	1857076 A	20/04/78
				BR	7703919 A	21/03/78
				CA	1079173 A	10/06/80
				DE	2727356 A,C	22/12/77
				JP	53004004 A	14/01/78
				MX	144881 A	30/11/81
				NZ	182243 A	06/03/78
EP	0774598	A1	21/05/97	CA	2170701 A	17/05/97
				DE	69608075 D,T	02/11/00
				FI	963324 A	17/05/97
				NO	963604 A	20/05/97
				US	5611583 A	18/03/97
US	4640538	A	03/02/87	DE	3669059 D	00/00/00
				EP	0223108 A,B	27/05/87
				JP	1056302 B	29/11/89
				JP	1571513 C	25/07/90
				JP	62188838 A	18/08/87

INTERNATIONAL SEARCH REPORT

Information on patent family members

25/02/01

International application No.

PCT/DK 01/00026

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0540475	A2	05/05/93	AU	656809 B	16/02/95
				AU	2604592 A	06/05/93
				JP	2859498 B	17/02/99
				JP	5201460 A	10/08/93
				MX	9205558 A	01/04/93
				US	5183301 A	02/02/93

US	3045303	A	24/07/62	NONE		

US	4074916	A	21/02/78	NONE		

US	5253003	A	04/10/94	JP	2309336 A	25/12/90

US	5765885	A	16/06/98	AU	4937393 A	12/04/94
				BR	9203596 A	22/03/94
				CA	2144647 A	31/03/94
				DE	69303907 D,T	12/12/96
				EP	0659149 A,B	28/06/95
				ES	2091025 T	16/10/96
				MX	9305609 A	31/03/94
				WO	9406701 A	31/03/94

US	5337459	A	16/08/94	BR	9401187 A	18/10/94
				CA	2117130 A	17/09/94
				EP	0621385 A	26/10/94
				JP	7054828 A	28/02/95
